

BTR17 XMOS firmware upgrade method:


Note: Before upgrading the firmware for BTR17, please unplug other decoders from the USB interface on the computer, otherwise the upgrade may fail!

1. Install Windows USB DAC driver:

<https://forum.fiio.com/note/showNoteContent.do?id=202105191527366657910&tid=17>

2. After the BTR17 is turned on, switches the mode toggle switch on the right side to PC mode. In settings, adjust USB mode to 2.0. Then connect the 'USB' port in BTR17 to the computer.

3. Double-click to open the "FiiO_Dfu_BTR17" upgrade tool, as shown in the figure below:

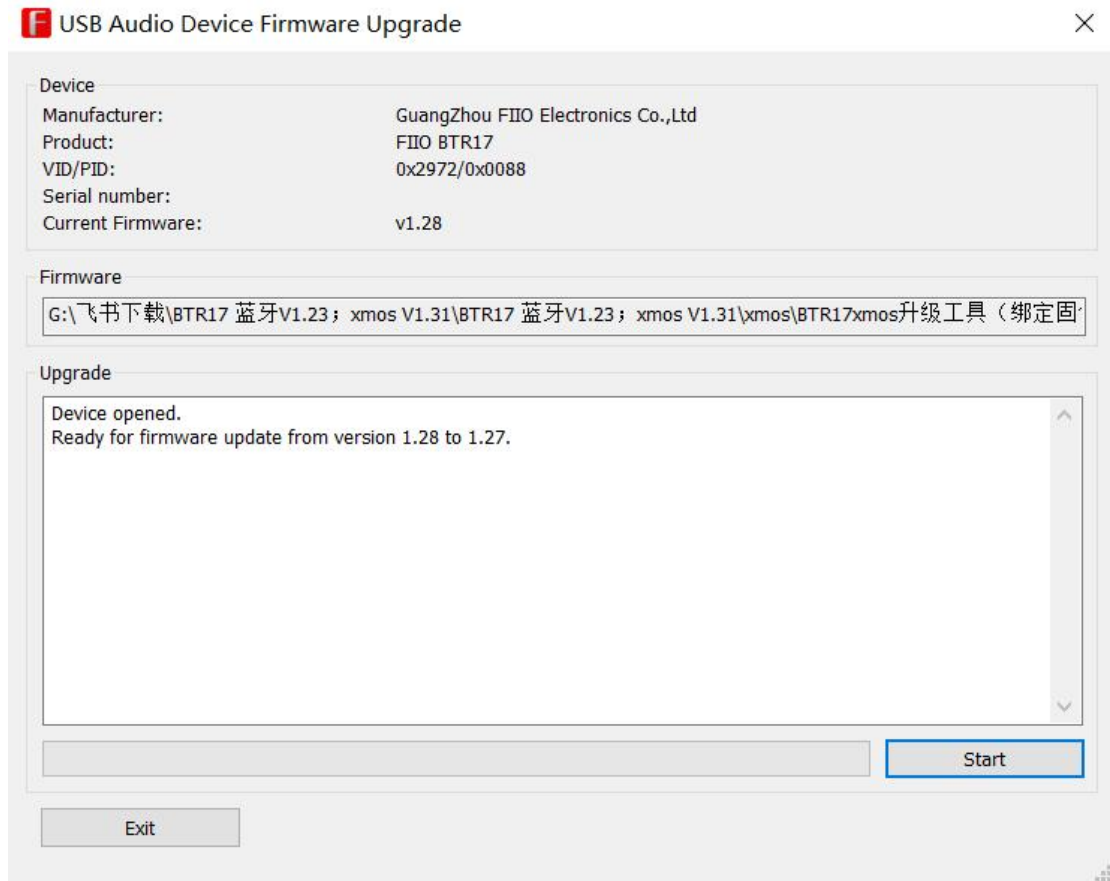

4. Click "Start". When "Firmware upgrade finished successfully." is displayed, it means that the XMOS firmware upgrade is successful.

USB Audio Device Firmware Upgrade



Device

Manufacturer: GuangZhou FIIO Electronics Co.,Ltd
Product: FIIO BTR17
VID/PID: 0x2972/0x0088
Serial number:
Current Firmware: v1.31

Firmware

G:\飞书下载\BTR17 蓝牙V1.23; xmos V1.31\BTR17 蓝牙V1.23; xmos V1.31\xmos\BTR17xmos升级工具 (绑定固

Upgrade

Device opened.
Ready for firmware update from version 1.28 to 1.27.

Entering upgrade mode...
Upgrading firmware...
389120 of 389120 bytes transferred.
Starting firmware...

Firmware upgrade finished successfully.



Start

Exit